

WIFI-dongel TYPE 2:

MONITORING: CLOUD

X1-MINI



X1-AIR



X1-BOOST



X1-MINI + X1-AIR + X1 BOOST: HOW TO CONNECT THE WI-FI DONGLE TO THE INTERNET

1. Open, by preference on the pc/laptop, your internet access.




Select the Solax-dongle (Solax_

2. Open your internet browser.



3. Enter the following text in the browser : <http://5.8.8.8/>



Click Enter.

4. Fill the following screen:


Username : admin

Password : admin



Click OK.

The next screen opens:

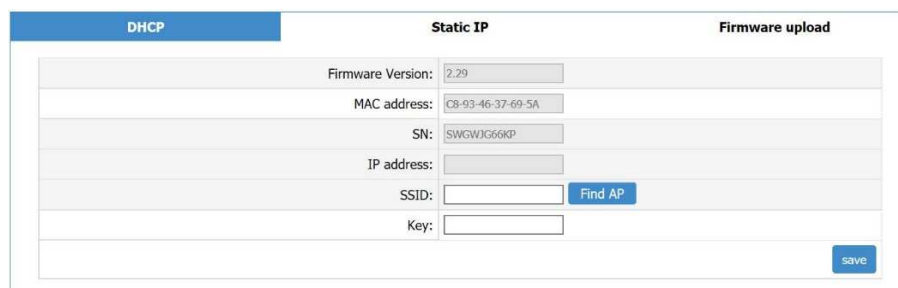

Click : Find AP

SSID	Signal
Utopia	84%
netaxsB	80%
LinksysE192	53%
ZigBee-100072	47%
HUAWEI-E536-8134	44%
Solax	40%
avon-henon	34%
ASUS	32%
dt-Dual-2G-Cellular-Duo-8040	30%
ORANGE-AMBA470-Solax	17%
Amoroso	14%
SproutPowerM115AF	13%
UBROADCOM-IF	13%

Refresh

Select your own home network.

SSID: Your network name will be automatically filled

Key : Fill in your password.

5. Click the save-button and wait 15 seconds....and click on the return-button.

If the numbers are filled in the IP-STATUS then the connection works. You can close the browser and select your own home network in the internet-access.